




BY DESIGN

decorative films


MODERN FILMS FOR TODAY'S SPACES.

Available in a variety of styles and opacities, the byDESIGN film portfolio offers modern solutions for today's spaces.

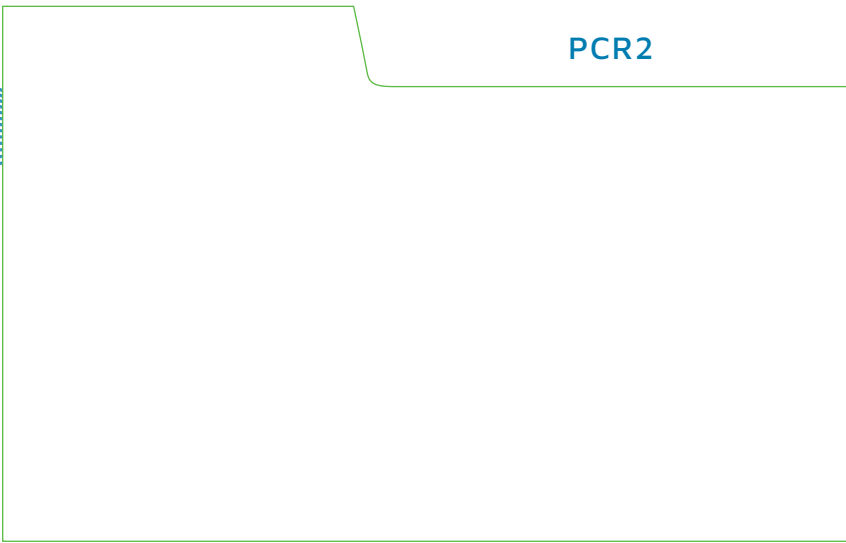

PCR2

Comparison of performance on 1/4" (6mm) thick clear glass.

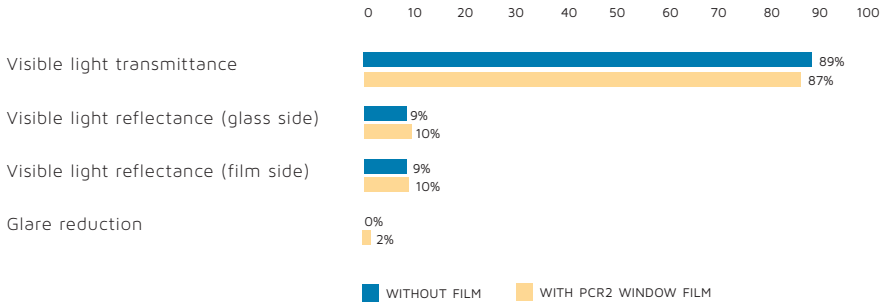

PCR2

Notes

1. Performance results are calculated using NFRC methodology and LBNL Window software, and are subject to variations within industry standards and only intended for estimating purposes. This data is provided for informational purposes only and are subject to normal manufacturing variances.
2. For full details and additional information please visit www.solargard.com/byDESIGN

Performance results	1/4" (6mm)
Visible light	
% Transmittance	87
% Reflectance (glass side)	10
% Reflectance (film side)	10
% Glare reduction	2
Solar heat gain coefficient	.78

Physical properties	
Gauge	2.0 mil (50 micron)
Type	Polyester
Adhesive	Clear, removable pressure-sensitive
Release liner	1.0 mil (25 micron)
Privacy factor (1-5)	NA

SK0314BDPCR2 5/20
© 2020, Saint-Gobain High Performance Solutions
and/or its affiliates • All Rights Reserved
www.solargard.com/byDESIGN

