



# PANORAMA® CX 60



INTERIOR VIEW



Comparison of performance on 1/4" (6mm) thick clear glass.

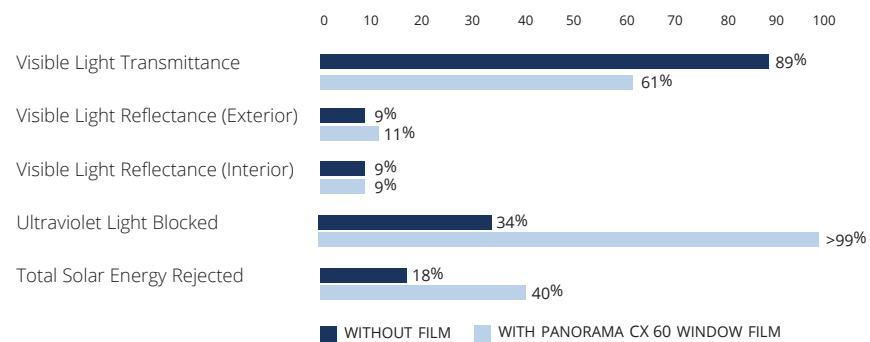


## PANORAMA® CX 60

CX 60 offers noticeable heat control and lets you enjoy the natural light from and look of your original windows, both inside and outside.

View the world through advanced engineering. With a superior level of durability, the CX Ceramic Series offers an attractive balance of solar heat rejection and low reflectance. With a natural appearance that maintains views, this film line is ideal for demanding coastal environments.

# PANORAMA® CX 60



EXTERIOR VIEW

## Performance Parameters for Different Window Types

	1/8" (3mm) Single clear		1/4" (6 mm) Single clear		1/8" (3mm) Double clear		1/4" (6mm) Double clear	
	No film	CX 60	No film	CX 60	No film	CX 60	No film	CX 60
<b>Visible light</b>								
Transmittance %	90	61	89	61	81	56	79	54
Reflectance exterior %	9	11	9	11	16	18	15	17
Reflectance interior %	9	9	9	9	16	12	15	12
Glare reduction %	0	32	0	32	0	31	0	32
<b>Solar Energy</b>								
Total solar energy rejected %	14	39	18	40	24	36	30	39
Solar heat gain coefficient	.86	.61	.82	.60	.76	.64	.70	.61
<b>Energy distribution</b>								
Transmittance %	83	49	77	45	69	41	61	36
Absorptance %	9	40	16	45	18	44	27	51
Reflectance %	8	11	7	10	13	15	12	13
<b>Thermal energy</b>								
Emissivity	.84	.89	.84	.89	.84	.89	.84	.89
Winter U-factor (Btu hr/ft² °F)	1.04	1.06	1.02	1.05	.48	.49	.47	.48
<b>Fade control</b>								
UV Tdw-ISO @ 300 to 700 nm %	85	40	82	40	74	37	70	36
Fade reduction %	0	53	0	51	0	50	0	49
Ultraviolet light blocked @ 300 to 380 nm %	27	>99	34	>99	41	>99	50	>99



1. Performance results are calculated using NFRC methodology and LBNL Window software, and are subject to variations within industry standards and only intended for estimating purposes. This data is provided for informational purposes only and are subject to normal manufacturing variances.  
 2. Performance results for glare and fade reduction are calculated by comparing filmed glass to that of untreated glazing.

ONLY AVAILABLE THROUGH A PANORAMA DEALER  
 For full details and additional information please visit [www.solargard.com/panorama](http://www.solargard.com/panorama).

SK0314PANCX60 09/20  
 © Copyright 2020, Saint-Gobain  
 High Performance Solutions and/or its affiliates

All Rights Reserved • [www.solargard.com](http://www.solargard.com)

Please recycle

